


fluxxLED

recessed step light

recessed step light

fluxxLED

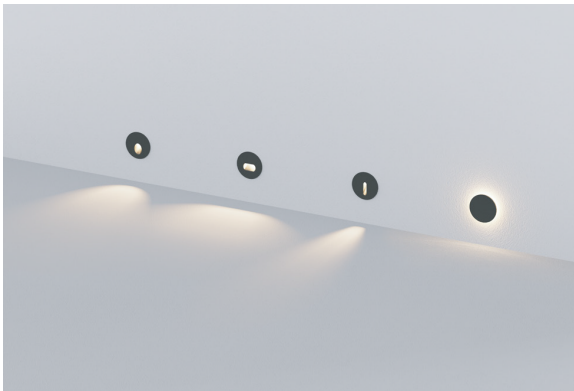


Model shown: F3-SLA/B/C/D

Product Specification


SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension HxW mm
F3-SLA	2W	(B) 60lm / (W)70lm	42 x 55
F3-SLB	2W	(B) 55lm / (W)65lm	42 x 55
F3-SLC	2W	(B) 20lm / (W) 30lm	42 x 55
F3-SLD	2W	(B) 40lm / (W) 50lm	50 x 55
F3-SLE	2W	(B) 60lm / (W) 70lm	42 x 55

Accessories

SKU		Dimension HxW mm
F3-SLRC	Recessing Canister	80 x 52



Product Dimensions

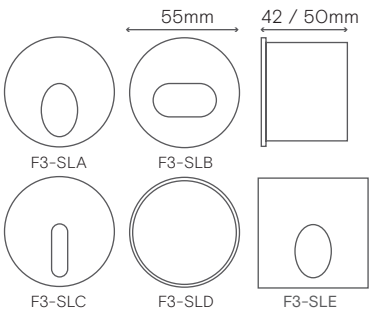

Physical

Material
PC / Aluminium

Finish
Black / White

Mounting Type
Recessed

Electrical

Voltage
24VDC

Control
Non-dimmable

Plug
0.6m

Optical

Beam Angle
Asymmetric

CCT
3000K, 4000K

CRI
80

UGR
> 19

Efficiency
(B) 10-30lm/W
(W) 15-35lm/W

SDCM
<3

Certification

Warranty
5 years

Category
IP65

Lifetime
L70 50000 Hrs

CE RoHS

IP65