fluxxLED

Udon
Optic

Udon Optic

fluxxLED



F3-UO


Product Specification

SKU	Wattage (Per metre)	Lumen Output (/m, @90CRI, 4000K)	LED Colour	LED/m
F3-UO	18W	1600lm	White	24

Technical Details

SKU	Cuttable (Every x mm)	Dimensions (WxH mm)	Bend radius
F3-UO	250mm	23 x 23	Top 180R Side 180R

Technical Drawing

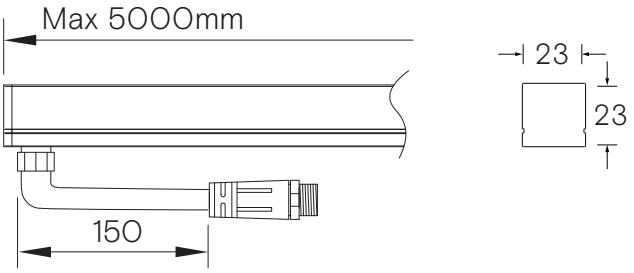

Physical

Material
Silicone

Trim Finish
White/ Dark Grey

Mounting Type
Surface Mount

Electrical

Voltage
24VDC

Max length
5M single feed

Control
Non-Dimmable

Optical

Beam angle
15°,25°,30°,45°,60°

CCT
2700 / 3000/ 4000K

CRI
90

Efficiency
89lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP67/ IK07

Lifetime
L70 50000 Hrs
AS/NZS 60598.2.1

CE RoHS

Udon Optic Accessories


fluxxLED


Cable entry

Default (entry from the back)




F3-U-E (end entry)






F3-U-SL (Left side entry)
F3-U-SR (Right side entry)

F3-U-D (Dual entry)





Mounting Profile

**Udon Optic uses the same mounting profile as Udon Large*




Aluminium Straight Mounting Profile
SKU: F3-UL-AM
26.5mm x 25mm x 1000mm







Stainless Steel Flexible Dual Direction Mounting Profile
SKU: F3-UL-SF
24mm x 24.2mm x 1000mm





Aluminium Flexible Vertical Direction Mounting Profile
SKU: F3-UL-AF1
26.5mm x 25mm x 1000mm





Aluminium Flexible Horizontal Direction Mounting Profile
SKU: F3-UL-AF2
26.5mm x 25mm x 1000mm

