
fluxxLED


Udon
Large

Udon Large

fluxxLED

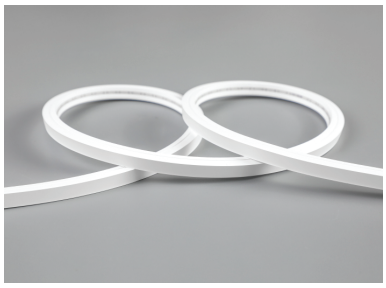

F3-UL

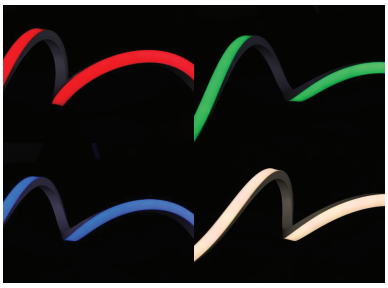

F3-UL(RGBW)


Product Specification

SKU	Wattage (Per metre)	Lumen Output (/m, @90CRI, 4000K)	LED Colour	LED/m
F3-UL	14W	880lm	White	120
F3-UL(RGBW)	14W	452lm(@80CRI)	RGBW	96

Technical Details

SKU	Cuttable (Every x mm)	Dimensions (WxH mm)	Bend radius
F3-UL	Free-cutting	23 x 23	Top 180R Side 180R
F3-UL(RGBW)	62.5mm	23 x 23	Top 180R Side 180R

Technical Drawing

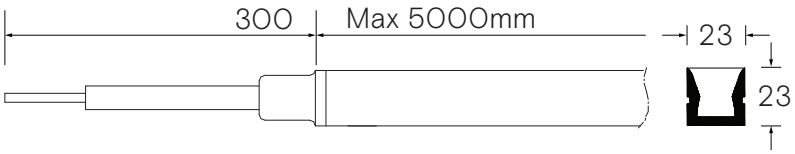

Physical

Material
Silicone

Trim Finish
White

Mounting Type
Surface Mount/Recessed

Electrical

Voltage
24VDC

Max length
5M single feed (white)
5M single feed (RGBW)

Control
Driver dependant
Non-Dim, Triac, DALI

Optical

Beam angle
Opal (120°)

CCT
2700 / 3000/ 4000
5000K/ 6000K

CRI
90

Efficiency
White: 63lm/W
RGBW: 32lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP67/ IK06

Lifetime
L70 50000 Hrs
AS/NZS 60598.2.1

CE RoHS

Udon Meduim Accessories

fluxxLED


Cable entry

Default (entry from the back)




F3-U-E (end entry)






F3-U-SL/SR (side entry)


F3-U-D (Dual entry)




Mounting Profile




Aluminium Straight Mounting Profile
SKU: F3-UL-AM
26.5mm x 25mm x 1000mm







Stainless Steel Flexible Dual Direction Mounting Profile
SKU: F3-UL-SF
24mm x 24.2mm x 1000mm





Aluminium Flexible Vertical Direction Mounting Profile
SKU: F3-UL-AF1
26.5mm x 25mm x 1000mm





Aluminium Flexible Horizontal Direction Mounting Profile
SKU: F3-UL-AF2
26.5mm x 25mm x 1000mm

