
fluxxLED

Udon
Medium

Udon
Medium

fluxxLED

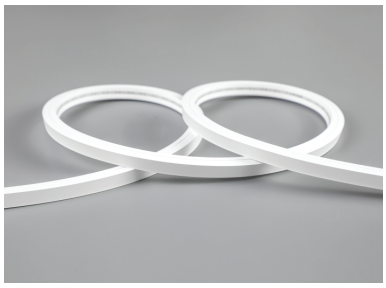

F3-UM



F3-UM(RGB)


Product Specification

SKU	Wattage (Per metre)	Lumen Output (/m, @90CRI, 4000K)	LED Colour	LED/m
F3-UM	14W	830lm	White	120
F3-UM(RGB)	14W	350lm(@80CRI)	RGB	120

Technical Details

SKU	Cuttable (Every x mm)	Dimensions (WxH mm)	Bend radius
F3-UM	Free-cutting	16 x 16	Top 120R Side 280R
F3-UM(RGB)	50mm	16 x 16	Top 120R Side 280R

Technical Drawing

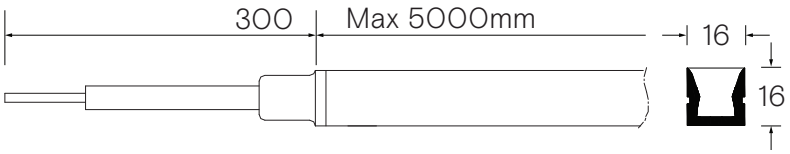

Physical

Material
Silicone

Trim Finish
White

Mounting Type
Surface Mount/Recessed

Electrical

Voltage
24VDC

Max length
5M single feed (white)

Control
Driver dependant
Non-Dim, Triac, DALI

Optical

Beam angle
Opal (120°)

CCT
2700 / 3000/ 4000
5000K/ 6000K

CRI
90

Efficiency
White: 59 lm/W,
RGB: 25 lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP67/ IK06

Lifetime
L70 50000 Hrs
AS/NZS 60598.2.1

RoHS

Udon Medium Accessories

fluxxLED


Cable entry

Default (entry from the back)




F3-U-E (end entry)






F3-U-SL/SR (side entry)


F3-U-D (Dual entry)




Mounting Profile




Aluminium Straight Mounting Profile
SKU: F3-UM-AM
18mm x 17.4mm x 1000mm







Stainless Steel Flexible Dual Direction Mounting Profile
SKU: F3-UM-SF
17.5mm x 16.5mm x 1000mm





Aluminium Flexible Vertical Direction Mounting Profile
SKU: F3-UM-AF1
18mm x 17.4mm x 1000mm





Aluminium Flexible Horizontal Direction Mounting Profile
SKU: F3-UM-AF2
18mm x 17.4mm x 1000mm

