

fluxxLED

dome pendant range

dome pendant

fluxxLED



Model shown: F3-PA3




Model shown: F3-PB3

Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension DxH mm
F3-PA3	10W	650-900lm	300 x 258
F3-PA4	18W	1600-1900lm	400 x 345
F3-PB3	10W	650-900lm	300 x 150
F3-PB4	18W	1600-1900lm	400 x 200

Product Dimensions

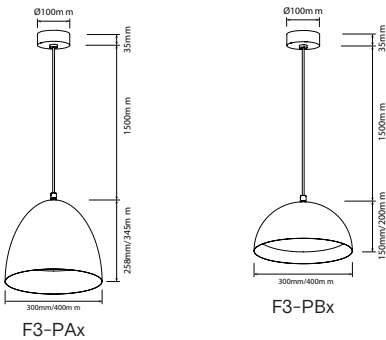

Physical

Material
PC / Aluminium

Finish
White RAL9016/ Black RAL9005
Reflector White RAL9016/ Gold RAL1034

Mounting Type
Suspended

Special Features

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable,
Triac, DALI,

Power Supply
Flicker Free

Optical

Beam Angle
100°

CCT
3000, 4000, 5000

CRI
80

UGR
> 19

Efficiency
65-105lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP20 / IK03

Lifetime
L70 >50000Hrs
AS/NZS 60598.2.1

