

fluxxLED

IP54 bulkhead range G2.0

IP54 round bulkhead G2.0

fluxxLED




Model shown: F3-18B3R

Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension DxH mm
F3-10B2R	10W	1250lm	250 x 53
F3-15B2R	15W	1750lm	250 x 53
F3-12B3R	12W	1600lm	300 x 53
F3-18B3R	18W	2300lm	300 x 53
F3-18B4R	18W	2450lm	400 x 53
F3-25B4R	25W	3200lm	400 x 53

Product Dimensions

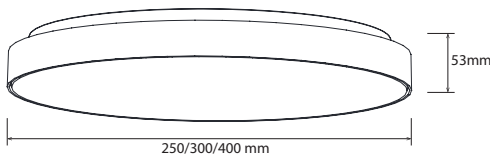

Physical

Material
PC

Finish
White RAL9016

Mounting Type
Surface mounted

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable,
Triac, DALI,

Power Supply
Flicker Free

Optical

Beam Angle
120°

CCT
3000, 4000

CRI
80

UGR
> 19

Efficiency
113-120lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP54 / IK08

Lifetime
L70 >50000Hrs
AS/NZS 60598.2.1



IP54 square bulkhead G2.0

fluxxLED




Model shown: F3-18B3S

Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension DxH mm
F3-10B2S	10W	1250lm	250 x 52
F3-15B2S	15W	1800lm	250 x 52
F3-12B3S	12W	1520lm	300 x 52
F3-18B3S	18W	2250lm	300 x 52
F3-18B4S	18W	2350lm	400 x 52
F3-25B4S	25W	3250lm	400 x 52

Product Dimensions

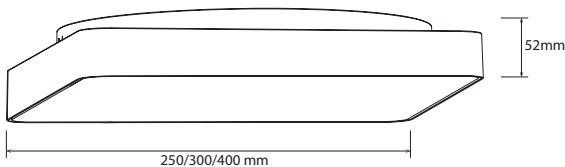

Physical

Material
PC

Finish
White RAL9016

Mounting Type
Surface mounted

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable,
Triac, DALI,

Power Supply
Flicker Free

Optical

Beam Angle
120°

CCT
3000, 4000

CRI
80

UGR
> 19

Efficiency
113-120lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP54 / IK08

Lifetime
L70 >50000Hrs
AS/NZS 60598.2.1

