


fluxxLED

pillar light range

Pillar Wall light

fluxxLED

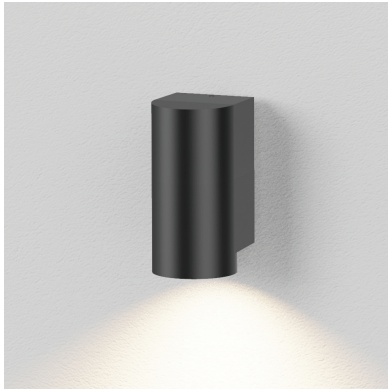

Model shown: F3-10PD




Model shown: F3-20PUD

Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension HxDxL mm
F3-5PD	5W	540lm	124 x 60 x 75
F3-10PD	10W	1100lm	160 x 80 x 96
F3-20PD	20W	2100lm	187 x 100 x 118
F3-10PUD	2 x 5W	1300lm	141 x 60 x 75
F3-20PUD	2 x 10W	2450lm	181 x 80 x 96
F3-40PUD	2 x 20W	4050lm	215 x 100 x 118

Product Dimensions

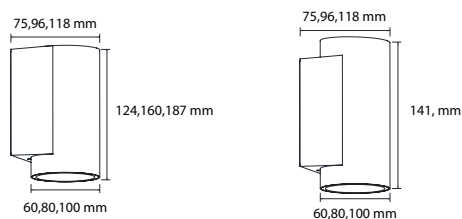

Physical

Material
PC / Die-Cast Aluminium

Finish
White RAL9016/ Black RAL9005

Mounting Type
Surface mounted

Special Features

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable, DALI

Power Supply
Flicker Free

Optical

Beam Angle
36, 60

CCT
2700, 3000, 4000, 5700,
CCT select

CRI
80

UGR
> 19

Efficiency
95-106lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP65 / IK08

Lifetime
L70 50000Hrs
AS/NZS 60598.2.1

