

fluxxLED


slim wall light range

Slim Wall light

fluxxLED



Model shown: F3-10SUD

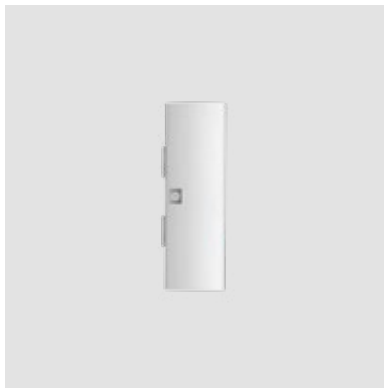

Physical

Material
PC / Die-Cast Aluminium

Finish
White RAL9016/ Black RAL9005

Mounting Type
Surface mounted

Special Features

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable,

Power Supply
Flicker Free

Optical

Beam Angle
Asymmetric

CCT
3000, 4000, 5700, CCT select

CRI
80

UGR
> 19

Efficiency
95-106lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP65 / IK10

Lifetime
L70 50000Hrs
AS/NZS 60598.2.1

Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension HxWxL mm
F3-6SUD	2 x 3W	600lm	90 x 30.5 x 135
F3-10SUD	2 x 5W	1000lm	90 x 30.5 x 175
F3-6SD	6W	640lm	90 x 30.5 x 135
F3-10SD	10W	950lm	90 x 30.5 x 175

Product Dimensions

